

Sealed Countertop Instructions

Parts Included:

- 1 faucet diverter valve with tubing
- 2 adapter rings
- 2 rubber washers
- 1 spout
- 1 sealed filter



These instructions apply to all of our sealed countertop filters, as shown in the above illustration.



Overseas Only:
1 - universal faucet valve adapter

INSTALLATION


Page 1

A. Remove existing aerator from the end of faucet.

B. Connect diverter valve to the faucet (**See diagram 1**).

If an adapter ring is needed, choose proper adapter ring and washer, install them to faucet.

Diagram 1

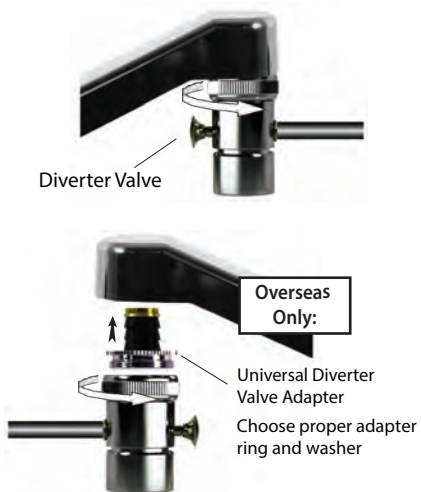

Install the diverter valve. Diverter valve should be tightened by hand only. Do not use any tools.

C. Attach the free end of the tubing to the water filter by pushing the tubing into the "quick connect" fitting at the bottom of the unit (make sure tubing is pushed in as far as possible). **See diagram 2**


Diagram 2

Plastic Quick Connect Fitting

Cut the tube square and push it past the o-ring until the tube stops. Tube is secured in position.



Disconnection is just as easy: push the collet ring against body of fitting and slide tube out of fitting.

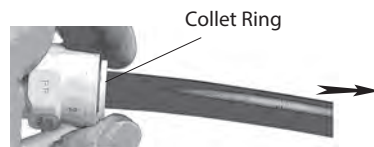

Note: Copper piping can be used with quick connect fittings but the pipe needs to be cut clean before inserting it into the fitting in order to prevent damage to the o-ring.

D. Place unit so that the spout is facing towards the sink. Turn on main faucet (cold water only).

INSTR-CT-CT4-PCT-2016

Sealed Countertop Instructions

Parts Included:

- 1 faucet diverter valve with tubing
- 2 adapter rings
- 2 rubber washers
- 1 spout
- 1 sealed filter



These instructions apply to any of our sealed countertop filters, as shown in the above illustration.



Overseas Only:
1 universal faucet valve adapter

INSTALLATION

Page 1

A. Remove existing aerator from end of faucet.

B. Connect diverter valve to faucet (**see diagram 1**).

If an adapter ring is needed, choose proper adapter ring and washer, install them to faucet.

Diagram 1



Install the diverter valve. Diverter valve should be tightened by hand only. Do not use any tools.

C. Attach the free end of the tubing to the water filter by pushing the tubing into the "quick connect" fitting at the bottom of the unit (make sure tubing is pushed in as far as possible). **See diagram 2**


Diagram 2

Plastic Quick Connect Fitting

Cut the tube square and push past the o-ring until the tube stops. Tube is secured in position.



Disconnection is just as easy: push collet ring against body of fitting and slide tube out of fitting.

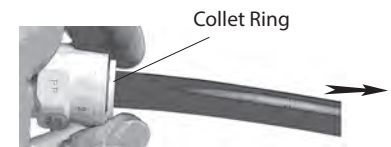

Note: Copper piping can be used with quick connect fittings but the pipe needs to be cut clean before inserting it into the fitting in order to prevent damage to the o-ring.

D. Place unit so that the spout is facing towards the sink. Turn on main faucet (cold water only).

INSTR-CT-CT4-PCT-2016

INSTALLATION

Page 2

E. Open the water at the sink faucet. Divert the water flow by activating the valve on the diverter body (see **diagram 3**). It takes a few seconds before water will flow through the filter and the spout. This will flush away any carbon fines. To ensure that all the trapped air in the unit is released, you may pick up the unit and gently shake it while the water is running.

Diagram 3



F. Allow water to run until it's clear (5 to 10 minutes). The filter is now ready for use.

Maintenance

If you experience a reduction in water flow or a change in the taste of the water, it may be time to replace the cartridge.

Recommended Use

- Temperature: cold water only (85 F / 29.4 C)
- Municipally treated water
- Max. water pressure: 85 psi (5.9 bar)
- Max. flow: 1/2 to 1 gpm (1.9 to 3.8 L/min.)
- Increased flow will reduce the unit's effectiveness.

INSTALLATION

Page 2

E. Open the water at the sink faucet. Divert the water flow by activating the valve on the diverter body (see **diagram 3**). It takes a few seconds before water will flow through the filter and the spout. This will flush away any carbon fines. To ensure that all the trapped air in the unit is released, you may pick up the unit and gently shake it while the water is running.

Diagram 3



F. Allow water to run until it's clear (5 to 10 minutes). The filter is now ready for use.

Maintenance

If you experience a reduction in water flow or a change in the taste of the water, it may be time to replace the cartridge.

Recommended Use

- Temperature: cold water only (85 F / 29.4 C)
- Municipally treated water
- Max. water pressure: 85 psi (5.9 bar)
- Max. flow: 1/2 to 1 gpm (1.9 to 3.8 L/min.)
- Increased flow will reduce the unit's effectiveness.