

UDF Series

GAC / Carbon / Media Filter

- ✓ KDF, Carbon & Cation Resin options
- ✓ Taste, odor and chlorine reduction
- ✓ Available in a variety of sizes
- ✓ High flow design



UDF SERIES GAC / CARBON / MEDIA FILTERS

are available in 10", 20" lengths, 2.5", 4.5" diameters. UDF filters utilize high quality coconut shell carbon, resin and /or KDF (known to be one of the most effective media for removal of organic compounds including VOCs, radon, chlorine, bad taste and odor). The UDF Series GAC / Carbon / Media Filters combine both quality and reliability at a competitive cost.

2.5" DIAMETER SPECIFICATIONS						
	Part Number	Description	Case Qty	Box Dimension (Inches)	Weight (lbs)	Weight (kgs)
10"	UDF-10	10" GAC, Coconut Shell Carbon	25	14 x 14 x 11	24	10.89
	UDF-10PF	10" GAC, Coconut Shell Carbon with Prefilter	25	14 x 14 x 11	24	10.89
	UDF-10C100E	10" Cation Softening Resin	25	14 x 14 x 11	27	12.25
	UDF-10KDF.5	10" GAC + 1/2 lbs KDF	25	14 x 14 x 11	35	15.88
	UDF-10KDF1	10" GAC + 1 lbs KDF	25	14 x 14 x 11	47	21.32
	UDF-10KDF2	10" GAC + 2 lbs KDF	25	14 x 14 x 11	67	30.39
	UDF-10KDF4	10" ALL 4 lbs KDF	25	14 x 14 x 11	105	47.63
20"	UDF-20	20" GAC, Coconut Shell Carbon	12	14 x 9.5 x 21	27	12.25
	UDF-20C200E	20" Cation Softening Resin	12	14 x 9.5 x 21	43	19.5

4.5" DIAMETER SPECIFICATIONS						
	Part Number	Description	Case Qty	Box Dimension (Inches)	Weight (lbs)	Weight (kgs)
10"	UDF-10BP	10" GAC, Coconut Shell Carbon	12	17 x 17 x 11	20	9.07
20"	UDF-20BP	20" GAC, Coconut Shell Carbon	6	14 x 9.5 x 21	33	14.96

UDF SERIES

GAC / Carbon / Media Filter
Data Sheet

Features & Benefits

- Durable Construction
- Excellent Flow Rate
- Pre/Post Filter Media

Materials of Construction


Filter Media:	Granular Activated Carbon
End Caps:	High Impact
Body:	Polystyrene (Hips)
Gasket:	Buna-N

Operating Data

40 °F to 125 °F (4.4 °C to 51.7 °C)
Min. Working Pressure: 20 psi
Max. Working Pressure: 125 psi



UDF Series GAC / Carbon / Media Filter

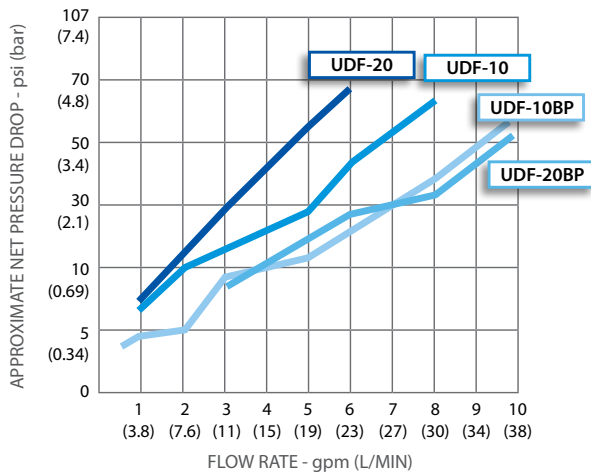

WARNING: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

NOTE: A drinking water cartridge may contain carbon fines (very fine black powder). After installation and before using water, follow the instructions for flushing the cartridge to remove fines.

NOTE: It is recommended that you flush for 20 seconds prior to using the water for drinking or cooking purposes.

NOTE: Chlorine reduction is the estimate of capacity using 2 ppm free available chlorine (FAC) at continuous flow greater than 75% reduction.

Distributed by:



3001 S.W. 15th Street, Suite C, Deerfield Beach, FL 33442
sales@h2ofilter.com • www.h2ofilter.com
Toll-Free Number: 1-800-570-3464
International: 1-954-570-3464

UDF-ALK Series
Alkaline Filters

- ✓ 12,000 gallon capacity*
- ✓ Increases alkalinity and negative ORP (Oxidation Reduction Potential)
- ✓ Adds beneficial minerals back into water
- ✓ 4.5" x 20" Perfect for water stores, water stations and bottlers



UDF-ALK SERIES FILTERS

produce perfectly ph balanced alkaline water, helping to minimize fluctuations in your normal pH. DF-ALK Series filters increase the antioxidant level (negative ORP) in your water to neu-tralize free radicals and DNA damage. Unlike regular water which has a positive ORP which could create damaging free radicals in your body, UDF-ALK Series filters increase negative ORP levels to provide you with water that acts as an antioxidant.

UDF-ALK SERIES FILTERS

increase the pH of drinking water from the tap to a range of about 8.5 to 10 (alkaline). There are many health benefits attributed to raising the pH level in the body and obtain a more alkaline state that optimizes the body's health. UDF-ALK add beneficial Calcium and Magnesium to the water while also increasing the water's ORP (antioxidant level).

UDF-ALK SERIES FILTERS

help change acidic RO water into a perfect natural alkali calcium ionized water by adding back into the water essential and beneficial elements such as ionized calcium, magnesium, sodium and potassium.

ALKALINE / ORP - 2.5 & 4.5" DIAMETER SPECIFICATIONS						
	Part Number	Description	Case Qty	Box Dimension (Inches)	Weight (lbs)	Weight (kgs)
10"	UDF-10-ALK	2.5"x 10"GAC, Coconut Shell Carbon, Alkaline / ORP	25	17 x 17 x 11	35	15.88
	UDF-10BP-ALK	4.5"x 10"GAC, Coconut Shell Carbon, Alkaline / ORP	8	19 x 10 x 11	32	15.88
20"	UDF-20-ALK	2.5"x 20"GAC, Coconut Shell Carbon, Alkaline / ORP	12	11 x 11 x 22	52	23.58
	UDF-20BP-ALK	4.5"x 20"GAC, Coconut Shell Carbon, Alkaline / ORP	4	10.5 x 10.5 x 21	33	14.96

WARNING: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

UDF-ALK SERIES

Alkaline Filters
Data Sheet

Benefits

- Increases the pH to 8.5 – 10
- Increases the negative ORP in your water
- Increases the alkalinity
- Adds beneficial minerals back into the water
- Easily connects to an existing RO system.

Multi Stage Bio Ceramic Alkaline Filter

- D600 Anti-oxidant Mineral Spheres
- Bio Ceramic Alkalizer
- ORP Mineral Stones
- D300 Alkalizing Bio Tablets
- Mineral Balls

BIO CERAMIC ALKALINE FILTER – UDF-10-ALK	
Service Life	12,000 gal (45,424 L)
Maximum Pressure	125 psi (8.6 bar)
Maximum Temperature	105° F (40.5° C)
Minimum Temperature	40° F (4.4° C)



Distributed by:



3001 S.W. 15th Street, Suite C, Deerfield Beach, FL 33442
sales@h2ofilter.com • www.h2ofilter.com

Toll-Free Number: 1-800-570-3464

International: 1-954-570-3464