

Brackets

Are made from white powder coated, cold rolled steel.

Available for slim HF2, HF3, HF5, and HF45 4.5" OD filter housings

| Part Number | Description | Housing to use | Case Quantity | Box Dimension (Inches) | Weight (lbs) | Weight (kgs) |
|-------------|--|----------------|---------------|------------------------|--------------|--------------|
| FM-10S | Bracket Anodized 2.05" W x 3.30" D x 1.55"H Single Slim Housing | HF2, HF3 | 200 | 11" x 11" x 4" | 33 | 14.97 |
| FM-10W | Bracket White 2.95" W x 3.30" D x 1.55"H Single Slim Housing | HF2, HF3 | 200 | 11" x 11" x 4" | 33 | 14.97 |
| FM-20W | Bracket White 2.95" W x 4.50" D x 2.30" H Single Commercial Housing | HF5 | 100 | 11" x 11" x 4" | 38 | 17.24 |
| FM-20AL | Bracket Aluminum 2.95" W x 4.50" D x 2.30" H Single Commercial Housing | HF5 | 100 | 11" x 11" x 4" | 38 | 17.24 |
| FM-25W | Bracket White 4.50" W x 6.90" D x 5.15" H Single 4.5" OD Housing | HF45 | 20 | 9" x 9" x 6" | 45 | 20.41 |
| FM-25AL | Bracket Aluminum Single 4.5" OD Housing | HF45 | 40 | 11" x 17" x 5" | 37 | 16.78 |
| FM-30W | Bracket White 9.25" W x 5.25" D x 2.30" H Double Housing, Bend Down | HF2, HF3 | 30 | 9" x 11" x 8" | 42 | 19.05 |
| FM-40W | Bracket White 9.25" W x 5.75" D x 2.30" H Double Housing, Bend Up | HF2, HF3 | 30 | 13" x 17" x 10" | 44 | 19.96 |
| FM-50W | Bracket White 14" W x 5.25" D x 2.3" H Triple Housing, Bend Down | HF2, HF3 | 20 | 8" x 15" x 5" | 44 | 19.96 |
| FM-60W | Bracket White 14" W x 5.75" D x 2.3" H Triple Housing, Bend Up | HF2, HF3 | 20 | 12" x 15" x 14" | 44 | 19.96 |
| FM-70W | Bracket White 13" W x 6.4" D x 3.25" H Triple Housing, Bend Up, Pump Mount | HF2, HF3 | 20 | 15" x 24" x 8" | 48 | 21.77 |
| FM-5-2 | HF5 Bracket White, Double, Bend Down | HF5 | 20 | 9" x 11" x 5" | 27 | 6.35 |
| FM-5-3 | HF5 Bracket White, Triple, Bend Down | HF5 | 20 | 9" x 18" x 5" | 53 | 14.97 |
| FM-45-2 | HF45 Bracket White, Double, Bend Down | HF45 | 10 | 14" x 10" x 7" | 49 | 22.23 |
| FM-45-3 | HF45 Bracket White, Triple, Bend Down | HF45 | 5 | 24" x 10" x 6" | 48 | 21.77 |
| FM-45-2STND | HF45 Bracket White, Double, Stand (DIY) | HF45 | 2 | 18" x 27" x 5" | 28 | 12.70 |
| FM-45-3STND | HF45 Bracket White, Triple, Stand (DIY) | HF45 | 2 | 28" x 25" x 5" | 37 | 16.78 |
| FM-T1 | Housing Bracket | T1, T2, T3 | 10 | - | 30 | 13.61 |



***Also available in Stainless steel and aluminum material upon special request.

** Special hole pattern and configuration available for quotation.

* FM-45-2STND and FM-45-3STND ship unassembled. DIY (Do-It-Yourself)



Distributed by: H₂O International Inc.

3001 S.W. 15th Street, Suite C, Deerfield Beach, FL 33442

sales@h2ofilter.com • www.h2ofilter.com

Toll-Free Number: 1-800-570-3464

International: 1-954-570-3464



IFR Series

| FLOW RESTRICTOR SPECIFICATIONS | | | | | |
|--------------------------------|--------------------------------------|-----------------|---------|--------------|--------------|
| Part Number | Description | Membrane to Use | Box Qty | Weight (lbs) | Weight (kgs) |
| IFR-300QC | Hydronix Flow Restrictor 300 ml/min | 24 gpd | 200 | 11 | 4.95 |
| IFR-420QC | Hydronix Flow Restrictor 420 ml/min | 36 gpd | 200 | 11 | 4.95 |
| IFR-550QC | Hydronix Flow Restrictor 550 ml/min | 50 gpd | 200 | 11 | 4.95 |
| IFR-800QC | Hydronix Flow Restrictor 800 ml/min | 75 gpd | 100 | 11 | 4.95 |
| IFR-1000 | Hydronix Flow Restrictor 1000 ml/min | 100 gpd | 300 | 15.5 | 6.83 |

*10% Accuracy



ASV Series Automatic Shut-off Valves

| PLASTIC NIPPLE SPECIFICATIONS | | |
|-------------------------------|---|---------|
| Part Number | Description | Bag Qty |
| ASV-14QW | Auto Shut-off valve 1/4" Hydrofit™ Quick Connect, White | 200 |
| ASV-38QW | Auto Shut-off valve 3/8" Hydrofit™ Quick Connect, White | 100 |



* ASV Series Automatic Shut-off Valves are available in white and black with Hydrofit™ Quick Connect fittings incorporated.

* At 60 PSI feed water pressure, RO System will turn off at 40 PSI. (Accuracy +/- 20%)

- Operating Pressure: 30-100 PSI
- Operating Temperature: 120 °F (50 °C)

Feed Water Valves

| FEED WATER VALVES SPECIFICATIONS | | |
|----------------------------------|---|---------|
| Part Number | Description | Box Qty |
| WNV-1 | Adaptor 1/2" F x 1/2" M x 1/8" F | 360 |
| WNV-2 | Adaptor 1/2" F x 1/2" M x 1/4" F | 250 |
| WNV-3 | Plastic Adaptor 1/2" F x 1/2" M x 1/4" - Hydrofit Quick Connect | 500 |
| WNV-4 | Plastic Adaptor 1/2" F x 1/2" M x 3/8" - Hydrofit Quick Connect | 500 |
| HDF-ASVA-14 | Angle Stop Valve Adaptor 3/8" Thread x 1/4" Tube (with 1/2" adaptor) | 200 |
| HDF-ASVA-38 | Angle Stop Valve Adaptor 3/8" Thread x 3/8" Tube (with 1/2" adaptor) | 200 |
| HDFS-ASVA-14 | Chrome Plated Angle Stop Valve Adaptor 3/8" Thread x 1/4" Tube (with 1/2" Adaptors) | 150 |
| HDFS-ASVA-38 | Chrome Plated Angle Stop Valve Adaptor 3/8" Thread x 3/8" Tube (with 1/2" Adaptors) | 150 |
| SV-3-14 | Saddle Valve Self-Piercing 1/4" | 200 |
| SV-6 | "C" Style Aluminum Clamp Self-Piercing 1/4" | 200 |
| SV-11 | "C" Style Aluminum Clamp Self-Piercing 3/8" | 100 |
| BV-1414-MC | Brass Ball Valve Straight 1/4" MPT x 1/4" Comp | 250 |
| BV-1814-MC | Brass Ball Valve Straight 1/8" MPT x 1/4" Comp | 400 |



Components



CLP Series

| CLIP SPECIFICATIONS | | |
|---------------------|-----------------------------------|---------|
| Part Number | Description | Box Qty |
| CLP-20W | Inline Mounting Clip 2", White | 1000 |
| CLP-25W | Membrane Housing Clip 2.5", White | 400 |
| CLP-30W | Membrane Housing Clip 3", White | 250 |
| CLP-2520W | Double Clip 2.5" x 2", White | 500 |
| CLP-2525W | Double Clip 2.5" x 2.5", White | 400 |

FW Series

| FILTER WRENCH SPECIFICATIONS | | |
|------------------------------|--|---------|
| Part Number | Description | Box Qty |
| FW-1 | Filter Wrench Fits HF2, HF3 Slim Filter Housing | 200 |
| FW-2 | Filter Wrench Fits HF5 Commercial Filter Housing | 150 |
| FW-3 | Filter Wrench Fits HF45 4.5" OD Filter Housing | 100 |
| FW-4 | Wrench for MH03-1812 Membrane Housing | 470 |
| FW-5 | Wrench for MH03-3012 Membrane Housing | 240 |



Pump Switches

| PUMP SWITCHES SPECIFICATIONS | | |
|------------------------------|---|---------|
| Part Number | Description | Box Qty |
| PMP-LPS14 | Low Pressure Switch, 1/4" Hydrofit™ QC (includes wire) | 200 |
| PMP-TSO14 | Tank Shut-Off Switch, 1/4" Hydrofit™ QC (includes wire) | 200 |



DS Series

| DRAIN SADDLE SPECIFICATIONS | | |
|-----------------------------|--|---------|
| Part Number | Description | Box Qty |
| DS-14MC | Drain Saddle 1/4" compression, Black | 200 |
| DS-14QC | Drain Saddle 1/4" Hydrofit™ Quick Connect, Black | 200 |
| DS-38QC | Drain Saddle 3/8" Hydrofit™ Quick Connect, Black | 200 |

Distributed by:



3001 S.W. 15th Street, Suite C, Deerfield Beach, FL 33442
 sales@h2ofilter.com • www.h2ofilter.com
Toll-Free Number: 1-800-570-3464
International: 1-954-570-3464

PG Series Pressure Gauges

- ✓ Lower and center back mount
- ✓ Brass or stainless steel internals
- ✓ Brass, 304 SS and 316 casings
- ✓ 1.5", 2.5" and 4" dials
- ✓ Liquid-filled

PG SERIES Pressure Gauges Data Sheet



PG SERIES PRESSURE GUAGES

are UV resistant, high quality pressure gauges designed with the OEM in mind. From the high grade synthetic fluid to our special chrome plated stems, we have designed a gauge that is not only accurate but durable.

PG SERIES PRESSURE GUAGES

have easy to read two-tone dials printed in bold UV resistant ink for ease of legibility even after extensive exposure to direct sunlight. Every gauge is tested for accuracy and leakage. PG Series pressure gauges are designed for demanding applications internationally such as reverse osmosis, oil refining, chemical, food processing plants and water treatment just to name a few.

| PG SERIES SPECIFICATIONS | | |
|--------------------------|-------------|--|
| | Part Number | Description |
| LOWER MOUNT | PG25100L | 2.5" Stainless Steel Gauge, 0-100 psi, (7 kg/cm ²), 1/4" NPT |
| | PG25160L | 2.5" Stainless Steel Gauge, 0-160 psi, (12 kg/cm ²), 1/4" NPT |
| | PG25200L | 2.5" Stainless Steel Gauge, 0-200 psi, (14 kg/cm ²), 1/4" NPT |
| | PG25300L | 2.5" Stainless Steel Gauge, 0-300 psi, (20 kg/cm ²), 1/4" NPT |
| CENTER BACK MOUNT | PG15150B | 1.5" Stainless Steel Gauge, 0-150 psi, (10 kg/cm ²), 1/4" NPT, Back Flange |
| | PG25100B | 2.5" Stainless Steel Gauge, 0-100 psi, (7 kg/cm ²), 1/4" NPT, Back Flange |
| | PG25160B | 2.5" Stainless Steel Gauge, 0-160 psi, (12 kg/cm ²), 1/4" NPT, Back Flange |
| | PG25300B | 2.5" Stainless Steel Gauge, 0-300 psi, (20 kg/cm ²), 1/4" NPT, Back Flange |
| | PG40100B | 4" Stainless Steel Gauge, 0-100 psi, (7 kg/cm ²), 1/2" NPT, Back Flange, no logo |
| | PG40300B | 4" Stainless Steel Gauge, 0-300 psi, (20 kg/cm ²), 1/2" NPT, Back Flange, no logo |
| | PGS40100B | 4" Stainless Steel Gauge, 0-100 psi, (7 kg/cm ²), 1/2" NPT, Back Flange, no logo |
| | PGS40300B | 4" Stainless Steel Gauge, 0-300 psi, (20 kg/cm ²), 1/2" NPT, Back Flange, no logo |

Materials of Construction

- Casings: Brass, 304 SS and 316 SS
- Internals: Brass and 316 SS
- Stems: Chrome-plated brass, 304 SS or 316 SS
- Face: White Aluminum, Black and Blue Print
- Lens: Clear Acrylic
- Pointer: Aluminum, Black
- Fluid: UV Resistant Synthetic Silicone


Temperature Rating

- 0 °F (-18 °C) to 140 °F (60 °C)

Optional Features

- Custom dials
- Special connections
- Various case materials
- Custom Labeling

Model # Guide

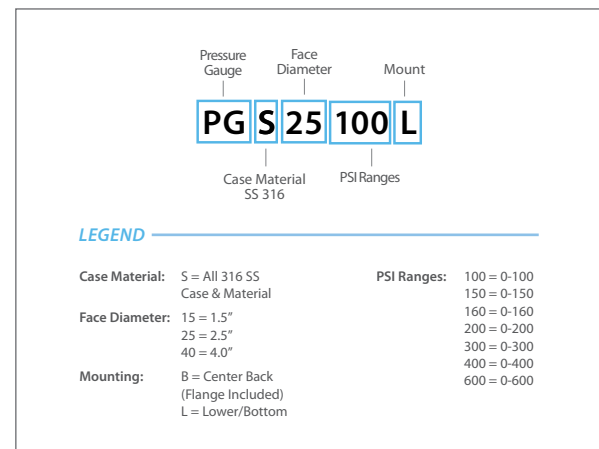



FLK-14



FLK-PAD



FLK-KIT

FLK Series

FLOWLOK LEAK SYSTEM

The FLOWLOK Leak Detector is an innovative device that installs right below your water filtration system in minutes. No special tools are required and it does not need electricity to operate. FLOWLOK Leak Detectors utilize a highly compressed safety disc that expands when it absorbs water. Once the safety disc has detected water it expands and trips the FLOWLOK safety lever to shut off the water entering the water filtration device. Safety discs are replaceable and are economical. (U.S.A. Patent No.: US 9,212,787 B1) The FLOWLOK Safety Kit is a convenient kit which combines the FLOWLOK Leak Detector and Safety Tray in one box. It comes with easy to follow installation instructions and two Safety Discs. The FLOWLOK Safety Kit is an absolute MUST HAVE on all below sink water filtration systems!

| FLOWLOK LEAK DETECTOR SPECIFICATIONS | | |
|--------------------------------------|---|---------|
| Part Number | Description | Box Qty |
| FLK-14 | Flowlok Leak Detector Water Shut-Off Valve 1/4" | 200 |
| FLK-PAD | Flowlok Expansion Pad | 8 |
| FLK-KIT | Flowlok Leak Detector w/ 2 pads + Safety Tray | 20 |
| HF2-TRAY | Flowlok Safety Tray | 30 |

USA Patent Number: US 9,212,787 B1

Flowlok and the Flowlok logo design are registered Trade-marks in the United States and certain other countries. The Flowlok device is patented in the United States, Patent Number: US 9,212,787 B1 and is protected by U.S. Patent and Trademark laws.

Distributed by:



3001 S.W. 15th Street, Suite C, Deerfield Beach, FL 33442
sales@h2ofilter.com • www.h2ofilter.com
Toll-Free Number: 1-800-570-3464
International: 1-954-570-3464